


ZealViz



STARLINK MINI CASE SET

User Manual


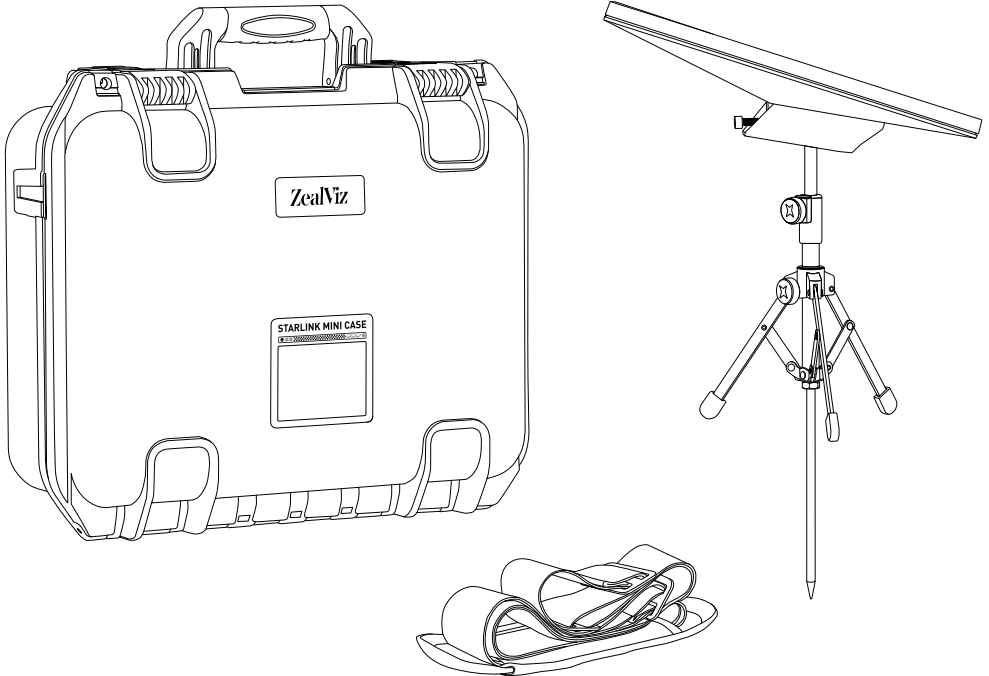


PROFESSIONAL GRADE · PREMIUM QUALITY


Instruction Video

Compatibility


Compatible with Starlink Mini

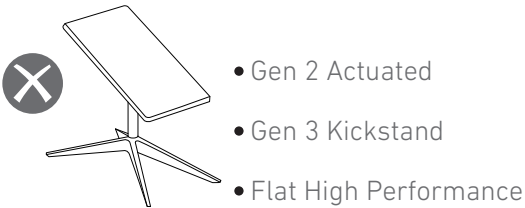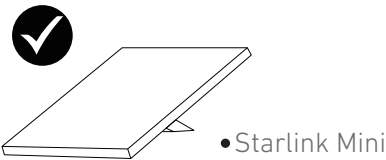


Package Contents

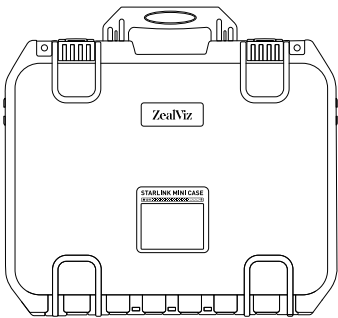


Carrying Case

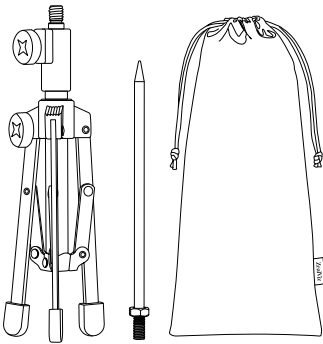

Ground Spike Tripod



Tripod Adapter

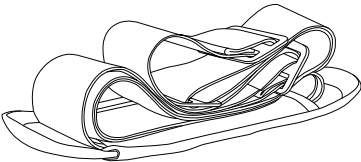

Shoulder Strap



Silicone Gasket

Product Features

IP67 Waterproof & Dustproof



O-ring seal design, waterproof up to 1m for 30 minutes, completely dustproof.

High Impact Resistance

Rugged High-Strength PP Construction

Portable Design

Ergonomic handle + shoulder strap, easy to carry by hand or shoulder,

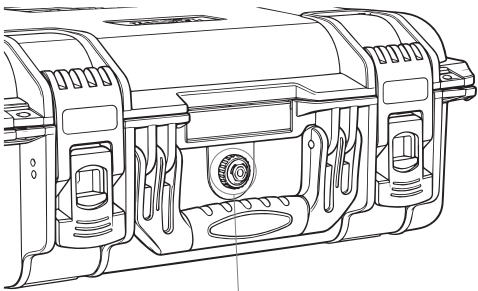



Automatic Pressure Relief Valve

Automatic Pressure Relief Valve


Balances internal and external pressure for easy opening at any altitude.

Interior Layout

Please remove the starlink mini bracket and fold all the items to the smallest size.

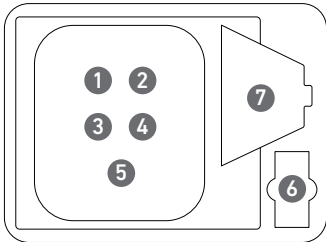

Shoulder Strap



Ground Spike Tripod

Note: The frame is not included in the set



Starlink Mini




DC Power Cable



Kickstand




Power Supply




Pipe Adapter


Shoulder Strap Installation

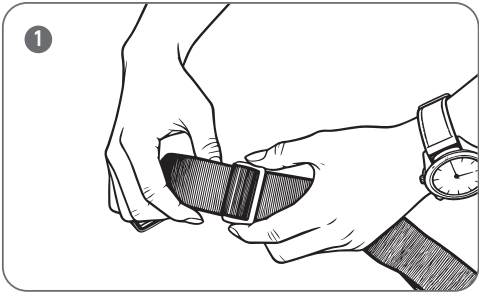

Adjust the shoulder strap to the appropriate length

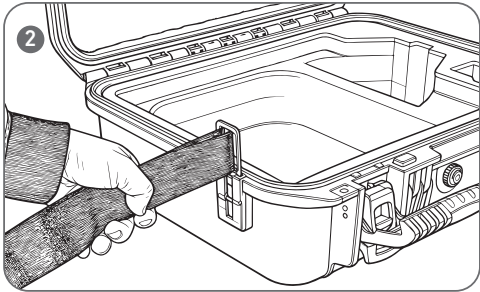


Snap the shoulder strap clips onto the side eyelets on the side of the box, and insert it into the corresponding slot.

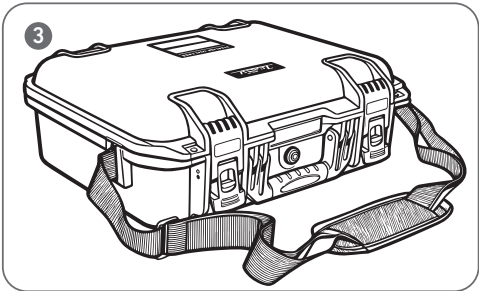


Close the storage box and complete the installation of the shoulder strap.


Locking Process Of The Storage Box Latch

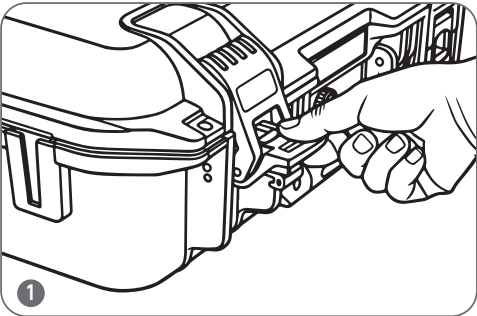


Lift the latch handle to make the latch engage with the upper cover of the storage box.

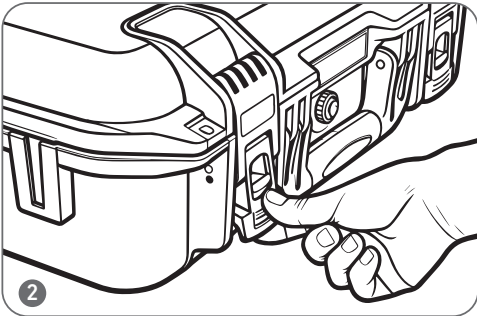

Press down on the latch handle to secure the latch in the slot.

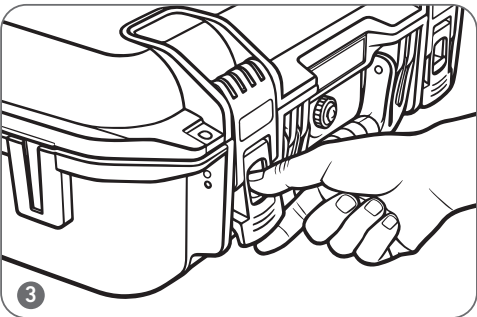

Press the button and gently push the latch handle.

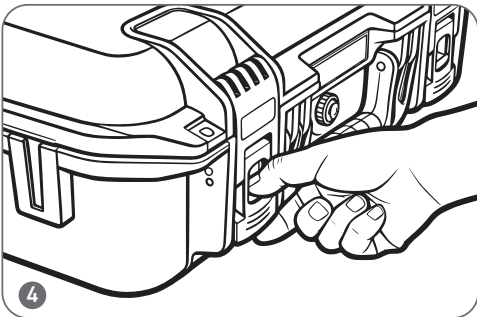

Latch securely closed

Tripod Adapter Instructions

1 Style identification


Confirm whether it is the "SPX-04176000-501 (2025)" or the "SSPX-04171000-515 (2024)"

- 2
- If it is "SPX-04176000-501 (2025)", please refer to Step3.
 - If it is "SPX-04171000-515 (2024)", the silicone gasket needs to be wound around the tripod dadter.



3 **Connect the Adapter**

Align the adapter with the Pipe Adapter, insert it and tighten it with screws.




Orient the tripod adapter so that the wider side (the side without the logo) faces inwards and attaches to the pipe adapter.


Ground Spike Tripod Installation

When installing or adjusting the height of the bracket, please make sure to remove the Starlink device first to prevent accidental falls.

Expand Legs and Lock Angle

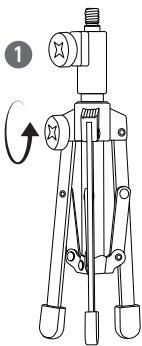


Turn knob counterclockwise to loosen.

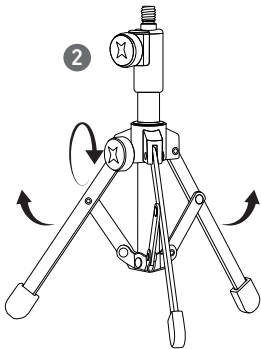


Extienda las patas y gire en sentido horario para bloquear

Adjust the height and lock it

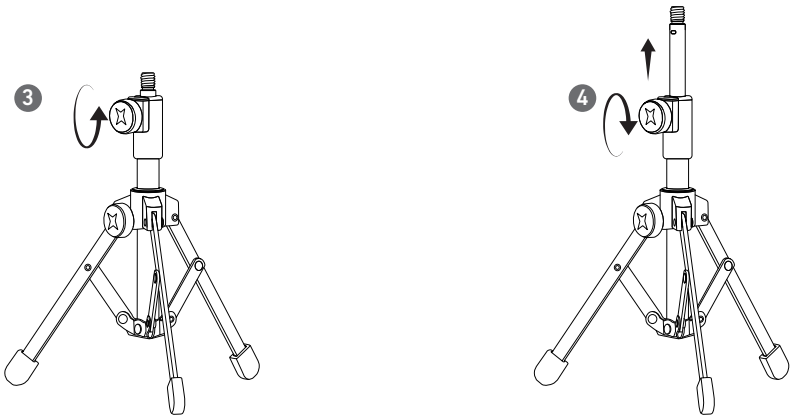


Rotate the knob at the top of the tripod counterclockwise.

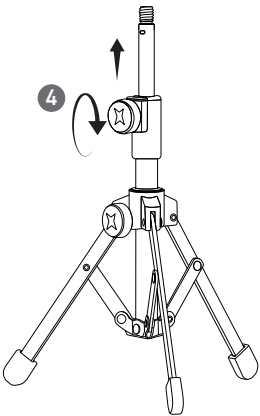


Adjust the extension pole, rotate the top knob clockwise, and tighten the locking mechanism.

Install Ground Spike

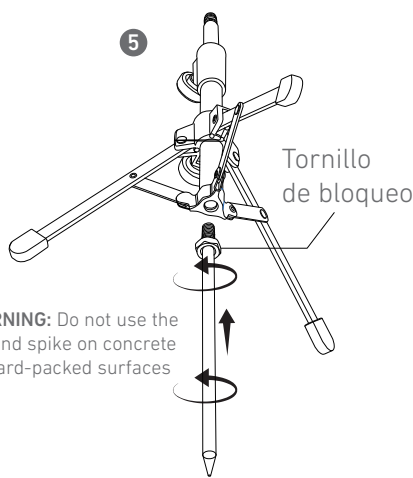


WARNING: Do not use the ground spike on concrete or hard-packed surfaces

Thread the ground spike in clockwise, Then tighten the locking screw clockwise

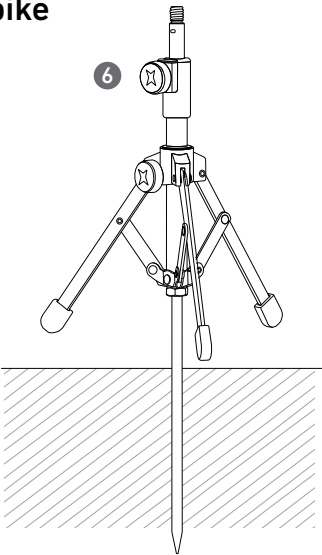


Insert ground spike for soft ground (grass, soil)



Connect Pipe Adapter



3/8" Interface



1/4" Interface

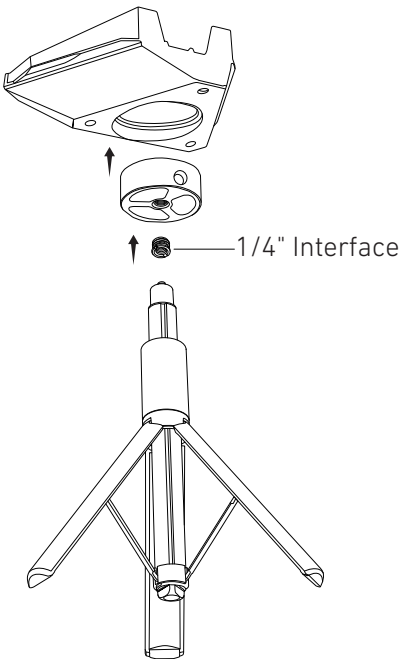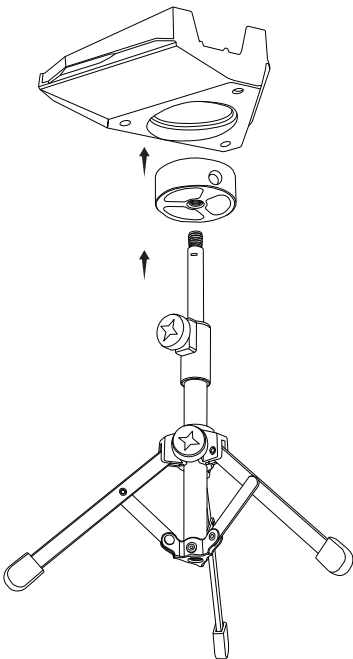

Adjust Height and Mount Device



Safety Warnings

- **WARNING:** Do not use during lightning or thunderstorms.
- **Caution:** Avoid areas with underground utilities (pipes, wires) when using the ground spike.
- Ensure all connections are tightened
- **Maximum Weight Capacity:**
11 lbs (5kg). Do not exceed.



Maintenance

- Clean after use
- Check screws regularly
- Store in dry, ventilated area
- Avoid prolonged sun exposure